

Techking **L5S** design for  
**Maximum Wear  
& Reliability**



### ☆ Reduced Partial Damage


A more uniform tire profile brings even load distribution that improves the tire's wear-resistance performance.

### ☆ Improved Durability

The innovative manufacturing process helps reduce the fatigue of rubber and provides higher TKPH rating.

### ☆ Better Cut-resistant Performance

Brand-new tire rubber and reinforcement materials are adopted to provide more protection against cuts and wear.

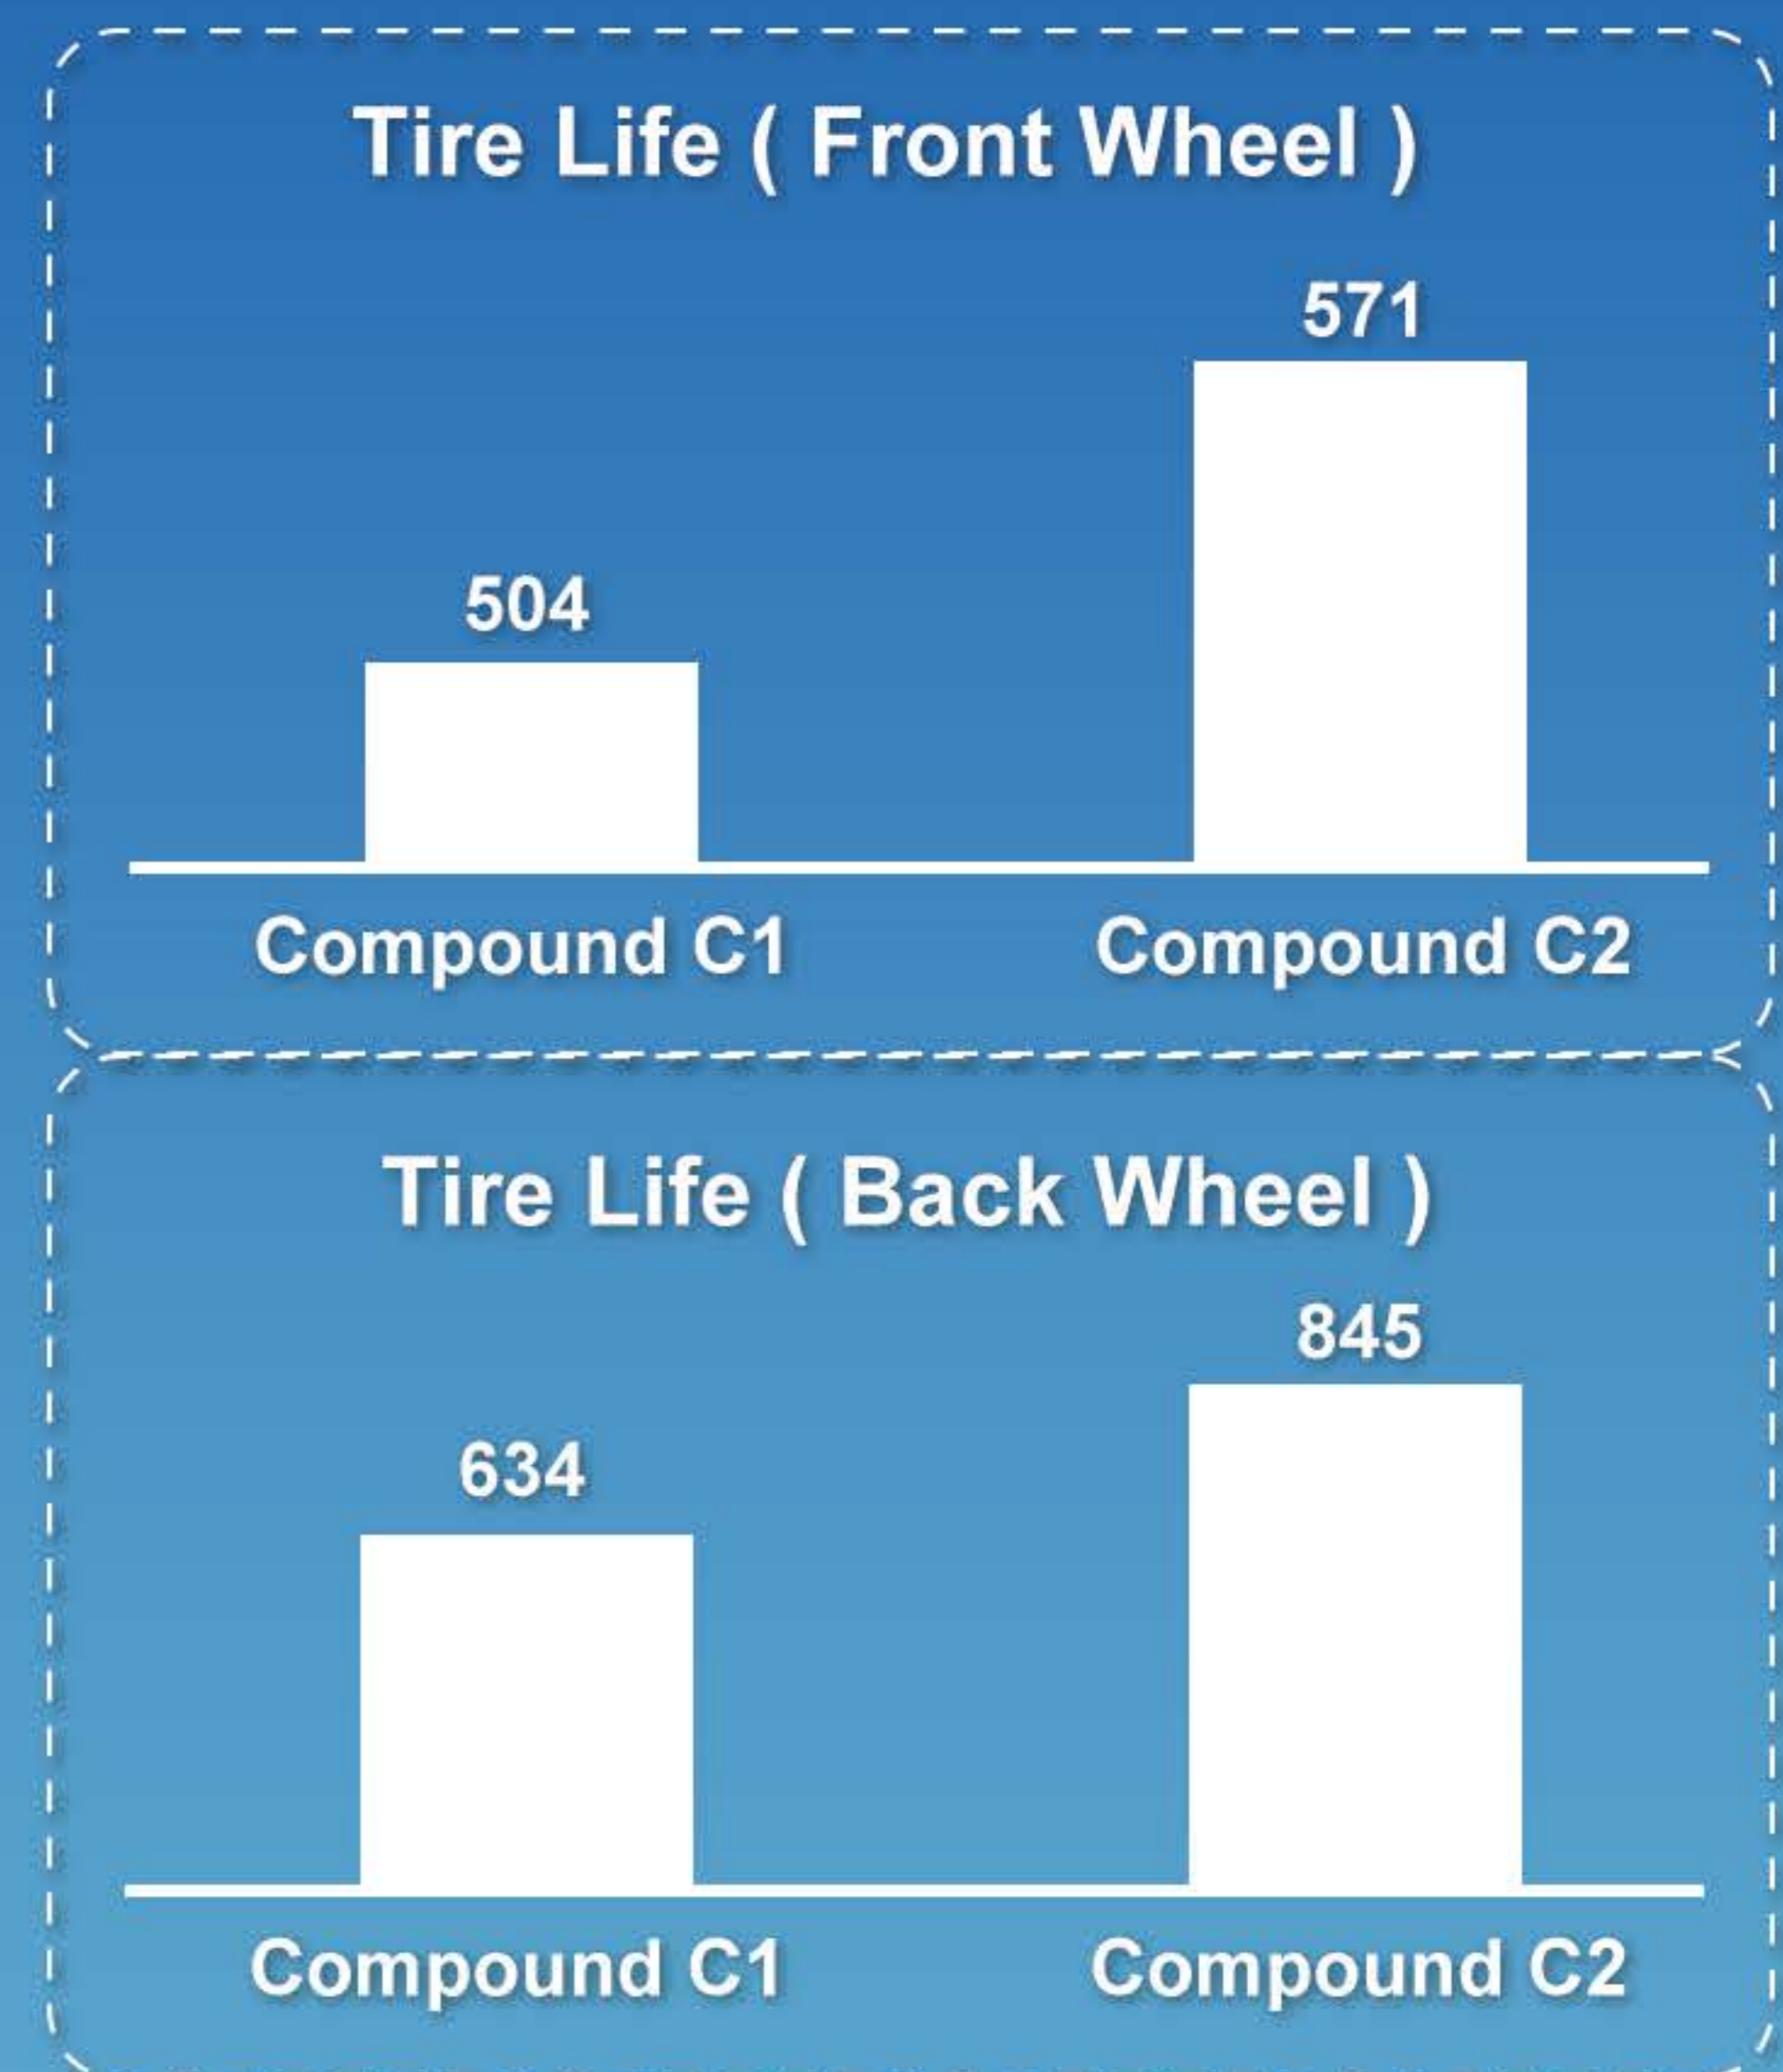

Size	TRA Code	Star Rating	Rim Width & Flange	Tread Depth		Load Index/ Speed Symbol	Type	Compound
				32nds	mm			
10.00R20	L4S	★★	7.50	45	35.5	166 A2	TL/TT	C1
12.00R20	L5S	★★	8.50-1.3	59	46.5	171 A2	TT	C1
18.00R25	L5S	★★	13.00-2.5	99	78.5	204 A2	TL	C2
17.5R25	L5S	★★	14.00-1.5	80	63.5	182 A2	TT/TL	C2
26.5R25	L5S	★★	22.00-3.0	111	88.5	209 A2	TL	C2
29.5R25	L5S	★★	25.00-3.5	124	98.5	216 A2	TL	C2
29.5R29	L5S	★★	25.00-3.5	124	98.5	218 A2	TL	C2
35/65R33	L5S	★★	28.00-3.5	121	96	224 A2	TL	C2