



LOADERS



# MATE E3L3



MATE L3

17.5R25 G3/L3 ★★


MATE E3L3

15.5R25 G3/L3 ★★

20.5R25 E3/L3 ★★


23.5R25 E3/L3 ★★

26.5R25 E3/L3 ★★

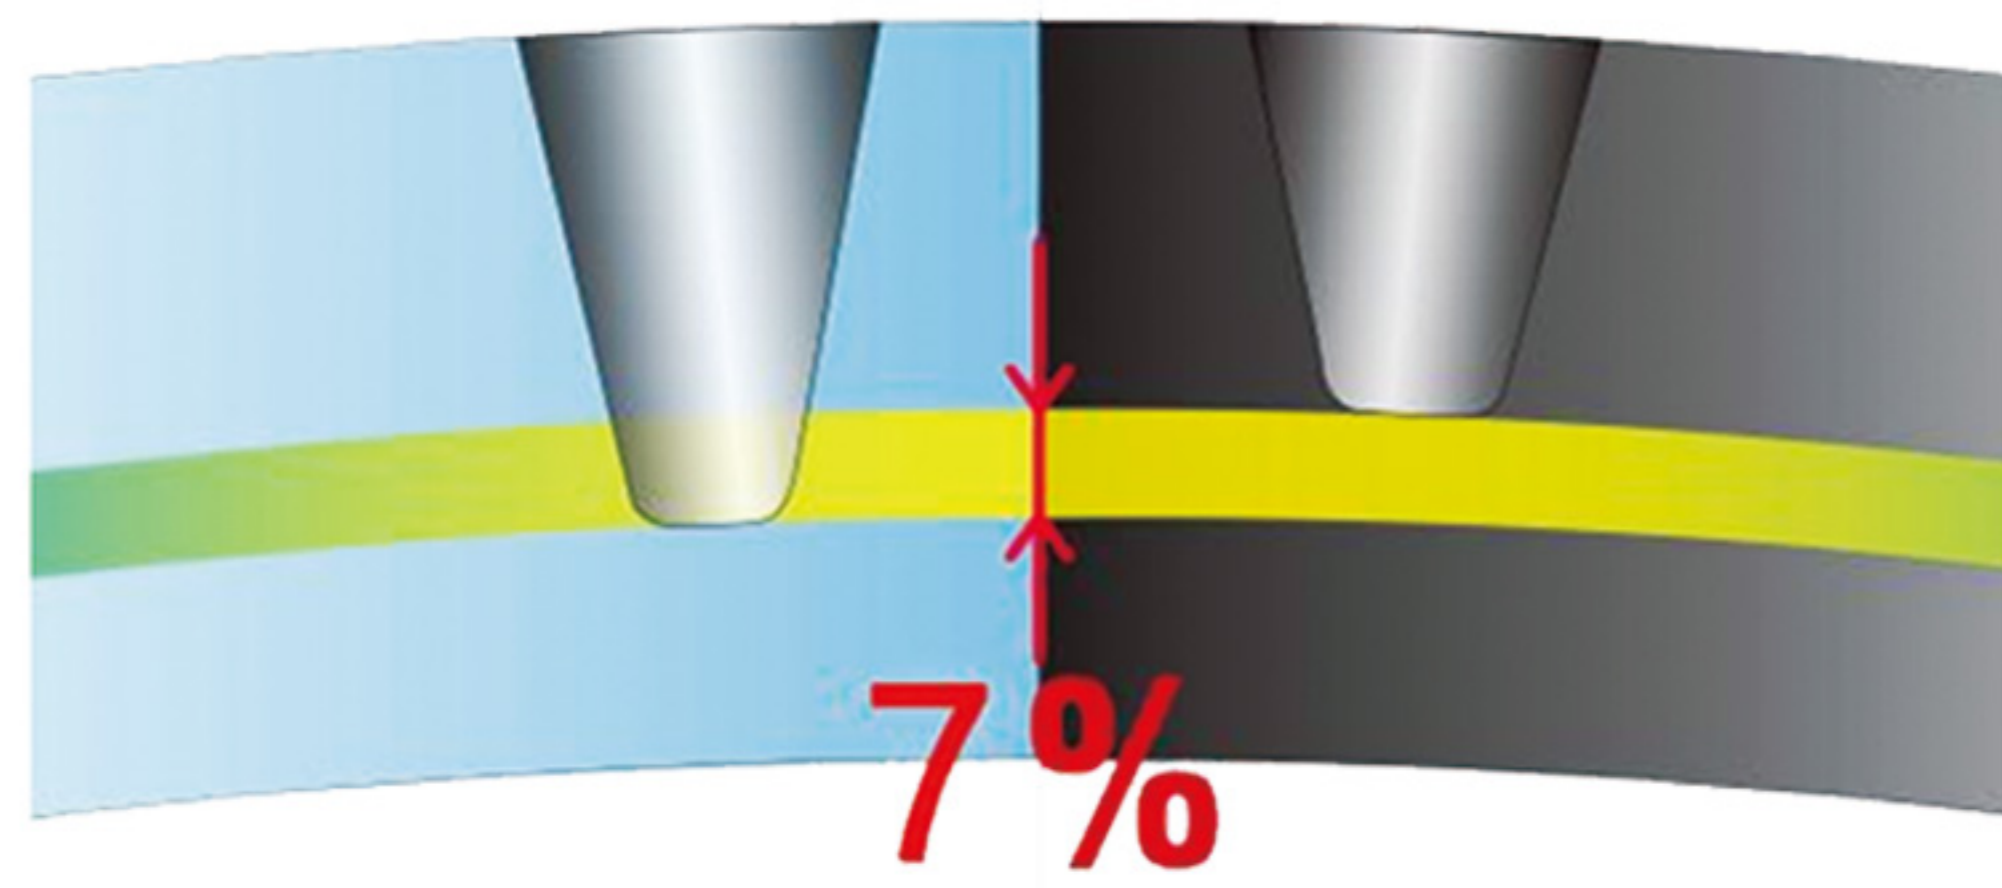

MATE E3L3 Normal Design

**OTD: 7% deeper than normal design**  
(20.5R25 and 23.5R25 only)

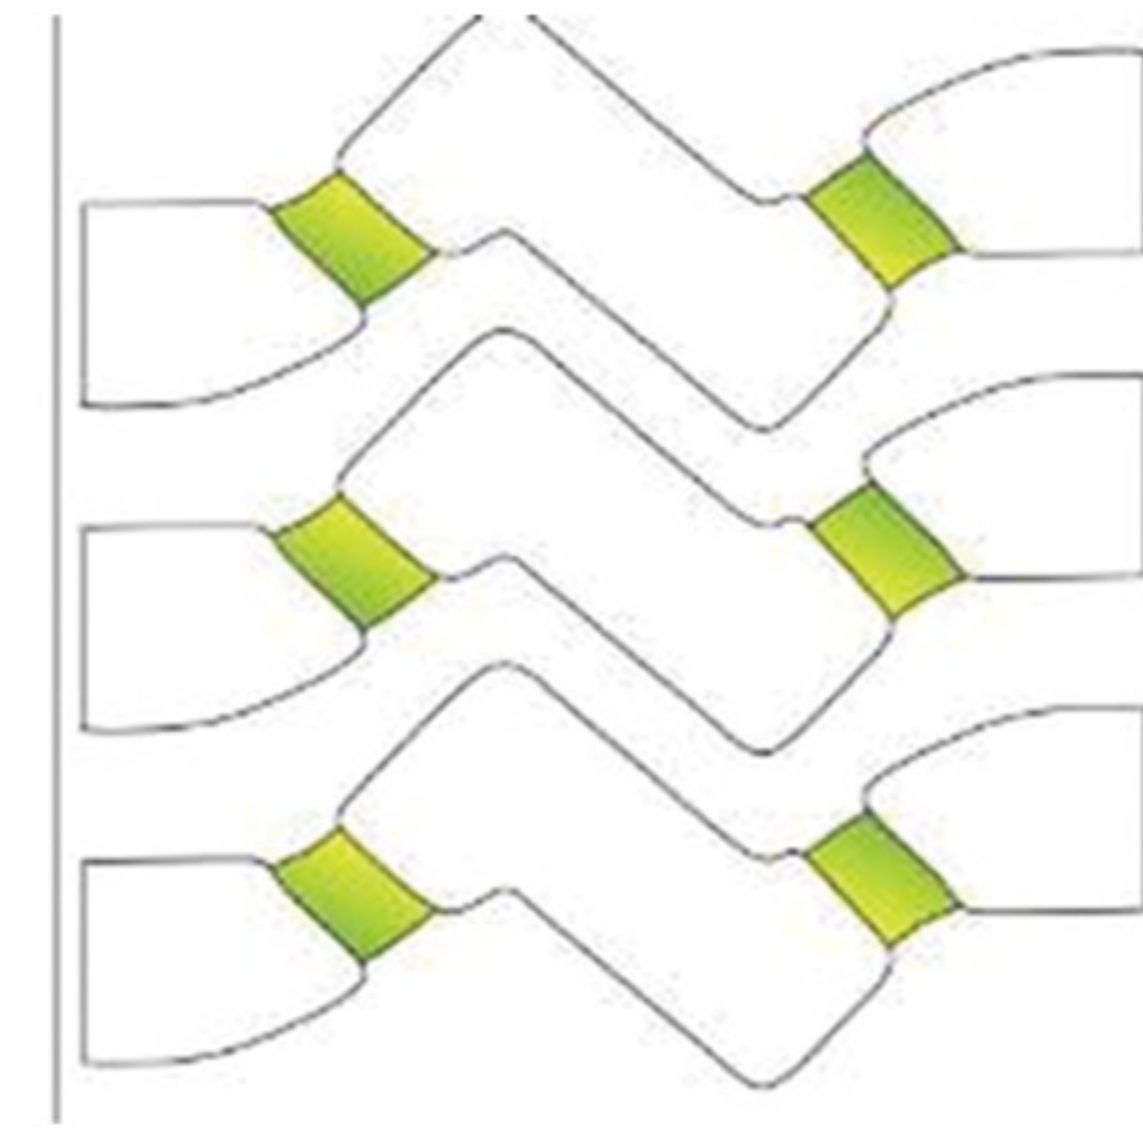

**Pattern Rib Design**  
(MATE E3L3 only)

### MATE E3L3

- ☆ **Longer tire life**  
OTD 7% deeper than normal design  
(20.5R25 and 23.5R25 only)
- ☆ **Improvement of controllability**  
special traction pattern design for loader application
- ☆ **Better wearing resistance performance**  
special tread formula

**15.5R25 G3/L3 ★★**  
**20.5R25 E3/L3 ★★**  
**23.5R25 E3/L3 ★★**  
**26.5R25 E3/L3 ★★**

### MATE L3

- ☆ **Better traction performance**  
block pattern design
- ☆ **Better wearing resistance performance**  
special tread formula

**17.5R25 G3/L3 ★★**

Pattern	Size	TRA Code	Star Rating	Rim Width & Flange	Tread Depth		Load Index/ Speed Symbol	Type	Compound
					32nds	mm			
MATE L3	17.5R25	G3/L3	★★	14.00-1.5	33	26	162 A8/182 A2	TL	C1
MATE E3L3	15.5R25	G3/L3	★★	12.00-1.3	33	26	161 A8/176 A2	TL	C1
MATE E3L3	20.5R25	E3/L3	★★	17.00-2.0	40	32	177 B/193 A2	TL	C1
MATE E3L3	23.5R25	E3/L3	★★	19.50-2.5	44	35	185 B/201 A2	TL	C1
MATE E3L3	26.5R25	E3/L3	★★	22.00-3.0	45	36	193 B/209 A2	TL	C1