




SUPER ROCK

Better Productivity
for Rough Off-road Site



RDT

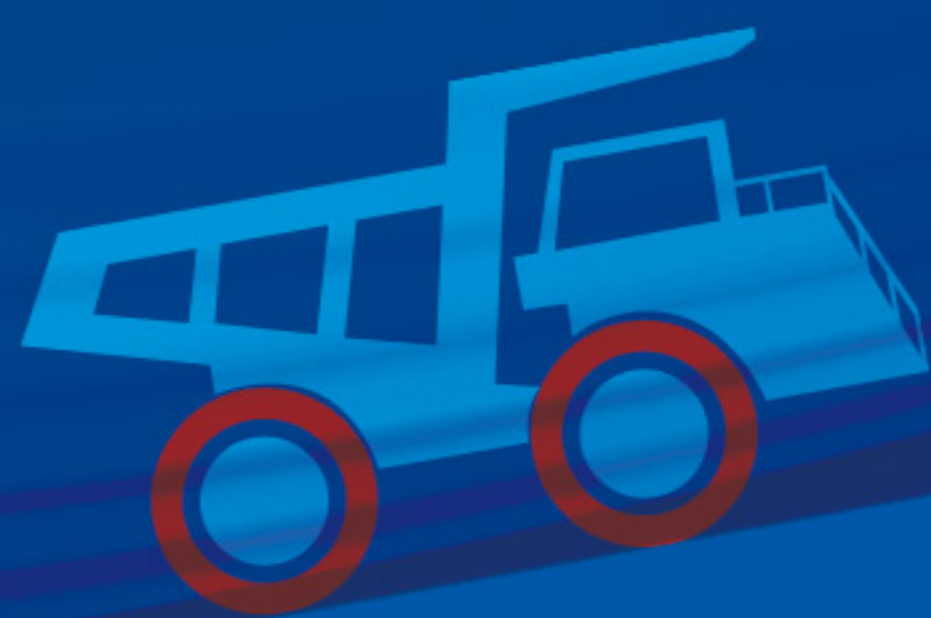

www.techking.com

SUPER ROCK

Better Productivity

for Rough Off-road Site

☆ Wider & Deeper Design



14% wider than normal design

11% deeper than normal design

☆ Multidirectional Heat Dispersion

Improving the heat dispersion efficiency

☆ Stone-ejection Design

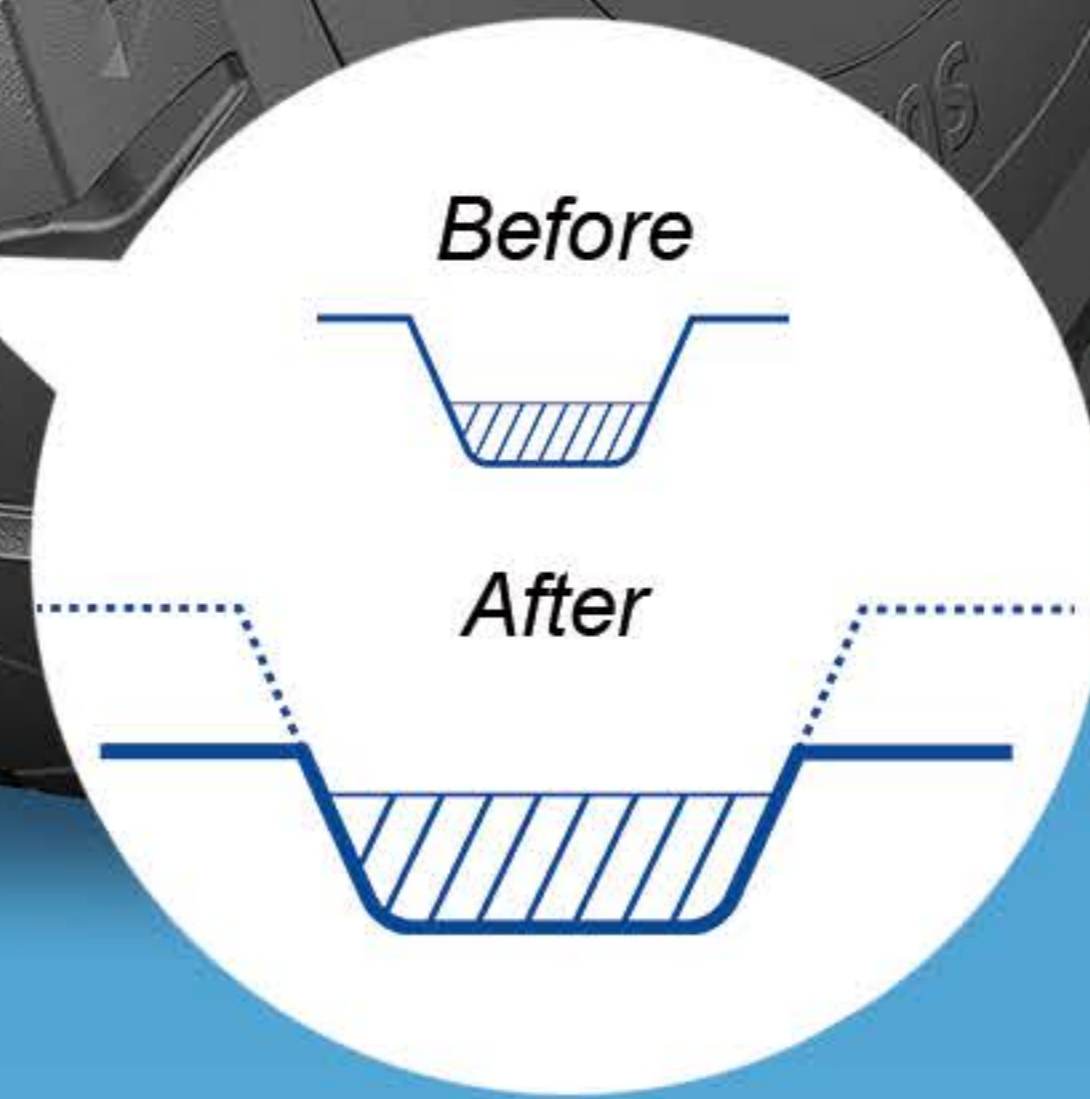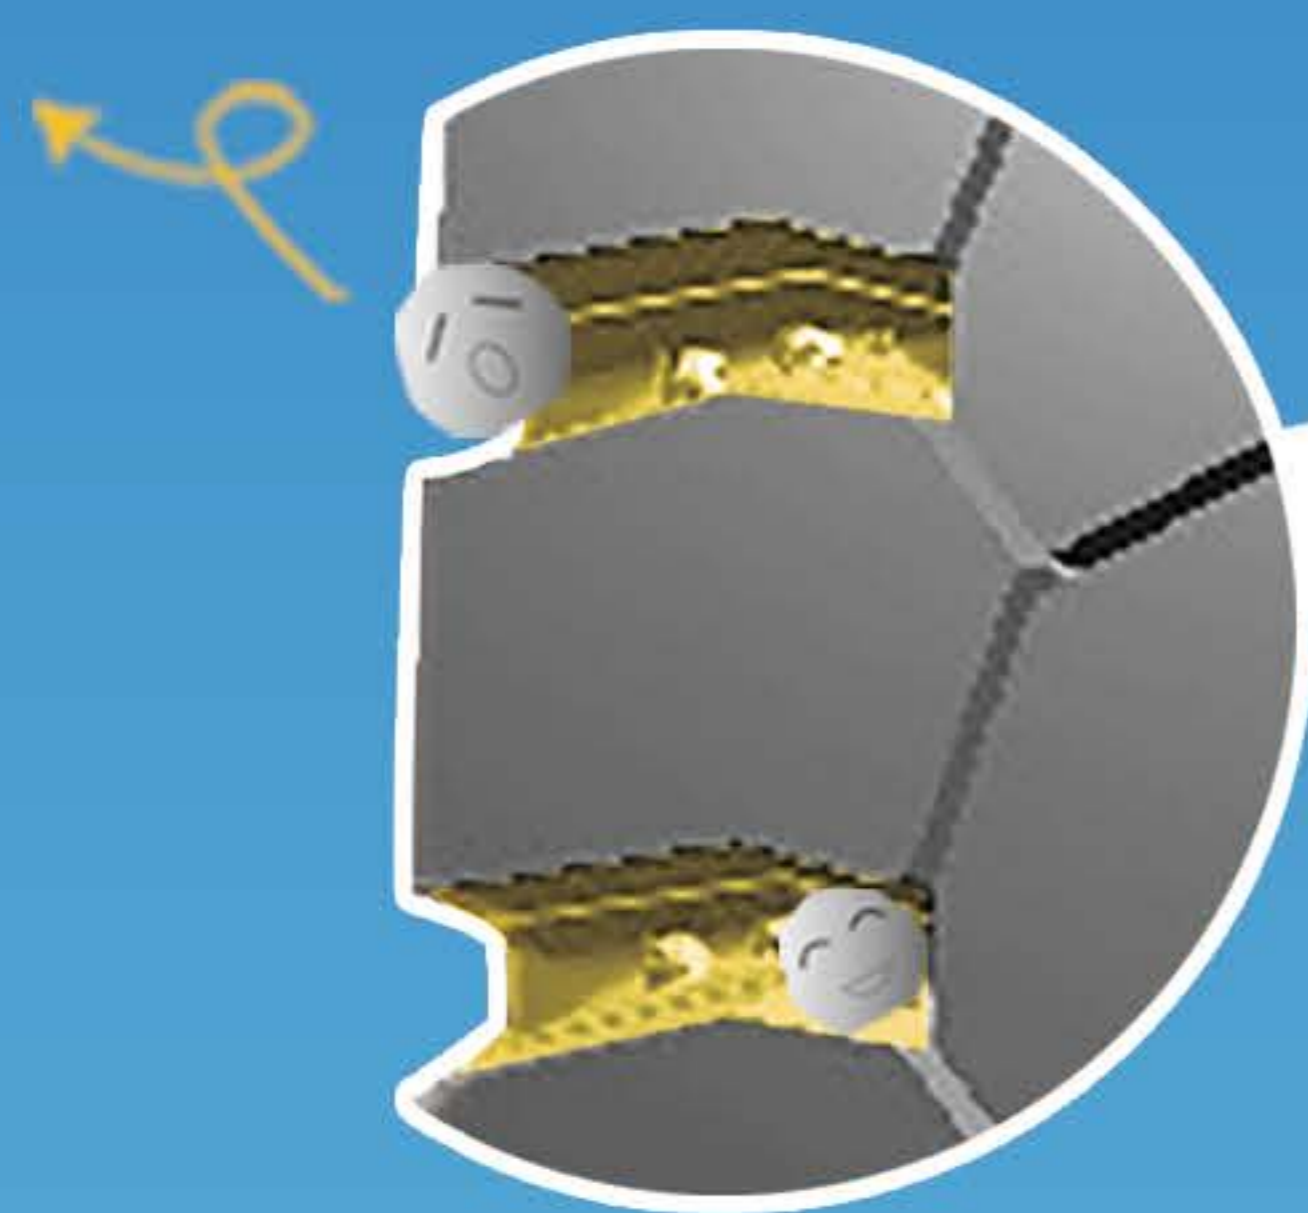

Stable Bridge for Bigger Contact Area
after 40% service life

Size	TRA Code	Star Rating	Rim Width & Flange	Tread Depth		Load Index/ Speed Symbol	Type	Compound
				32nds	mm			
24.00R35	E4	★★	17.00-3.5	91	72	209 B	TL	C1/CS/H2
27.00R49	E4	★★	19.50-4.0	103	82	223 B	TL	C1/R1/H2
40.00R57	E4	★★	29.00-6.0	122	97	250 B	TL	C1/CS/H2
46/90R57	E4	★★	29.00-6.0 32.00-6.0	122	97	252 B	TL	C1/CS/H2