

Excellent Traction & Better Mobility




RDT 

☆ **Excellent traction capacity**
by Horizontal Pattern Design



☆ **Better heat dispersion performance**
by Multidirectional Heat Dispersion Design

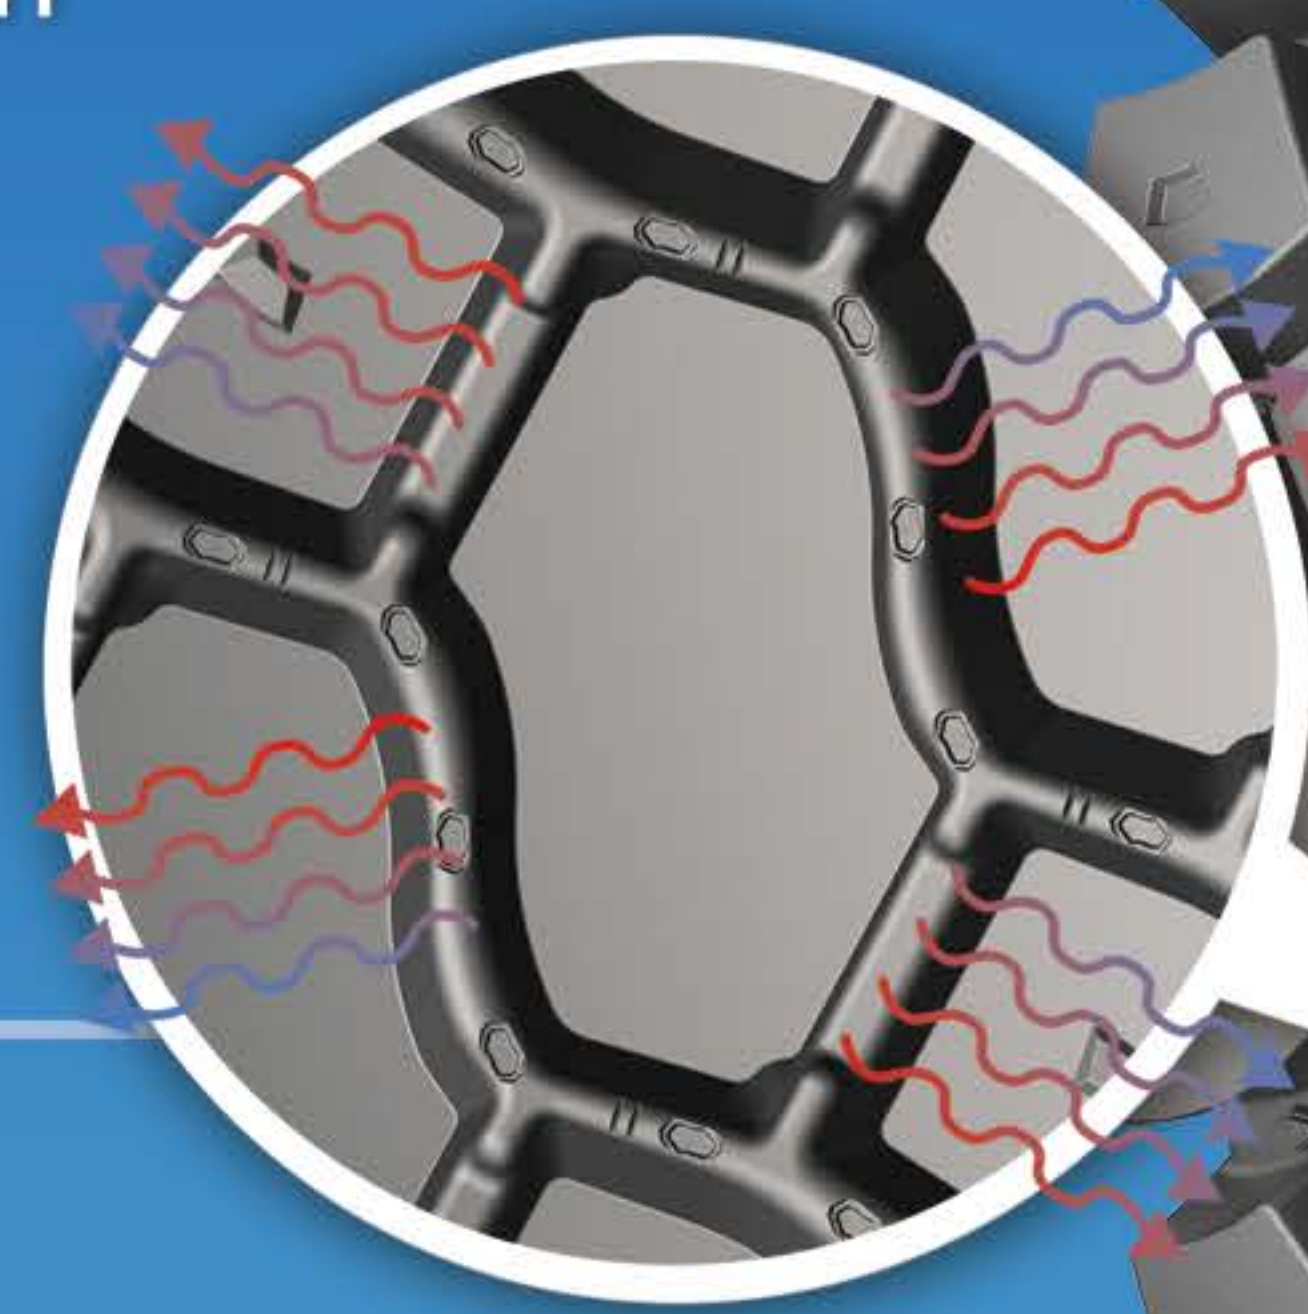

☆ **Better self-cleaning performance**
Stone Ejection Design
Asymmetric Groove Design



Size	TRA Code	Star Rating	Rim Width & Flange	Tread Depth		Load Index/Speed Symbol	Type	Compound
				32nds	mm			
24.00R35	E4	★★	17.00-3.5	79	63	209 B	TL	C1/CS/H2
27.00R49	E4	★★	19.50-4.0	93	74	223 B	TL	C1/CS/H2
33.00R51	E4	★★	24.00-5.0	116	92	235 B	TL	C1/CS/H2