

Better cut resistance & retread performance



ETOT



• **Better cut resistance performance**

Customized Compound Design



• **Better protection to the bottom of the groove**

Stone Shy Design



• **Better puncture resistance performance**


Great Wall Design for better protection for sidewall from cutting and scratch



12R22.5 ETOT Field Performance from Chile



General Information	
Vehicle Model	2DDTT
Tire Size & Pattern	12R22.5 ETOT
Speed	25~70 km/h
Wheel Position	Drive
One-way Distance	150 km
Original Tread Depth	24 mm
Avg. 1st total Mileage	86,266 km
Cargos	Wood

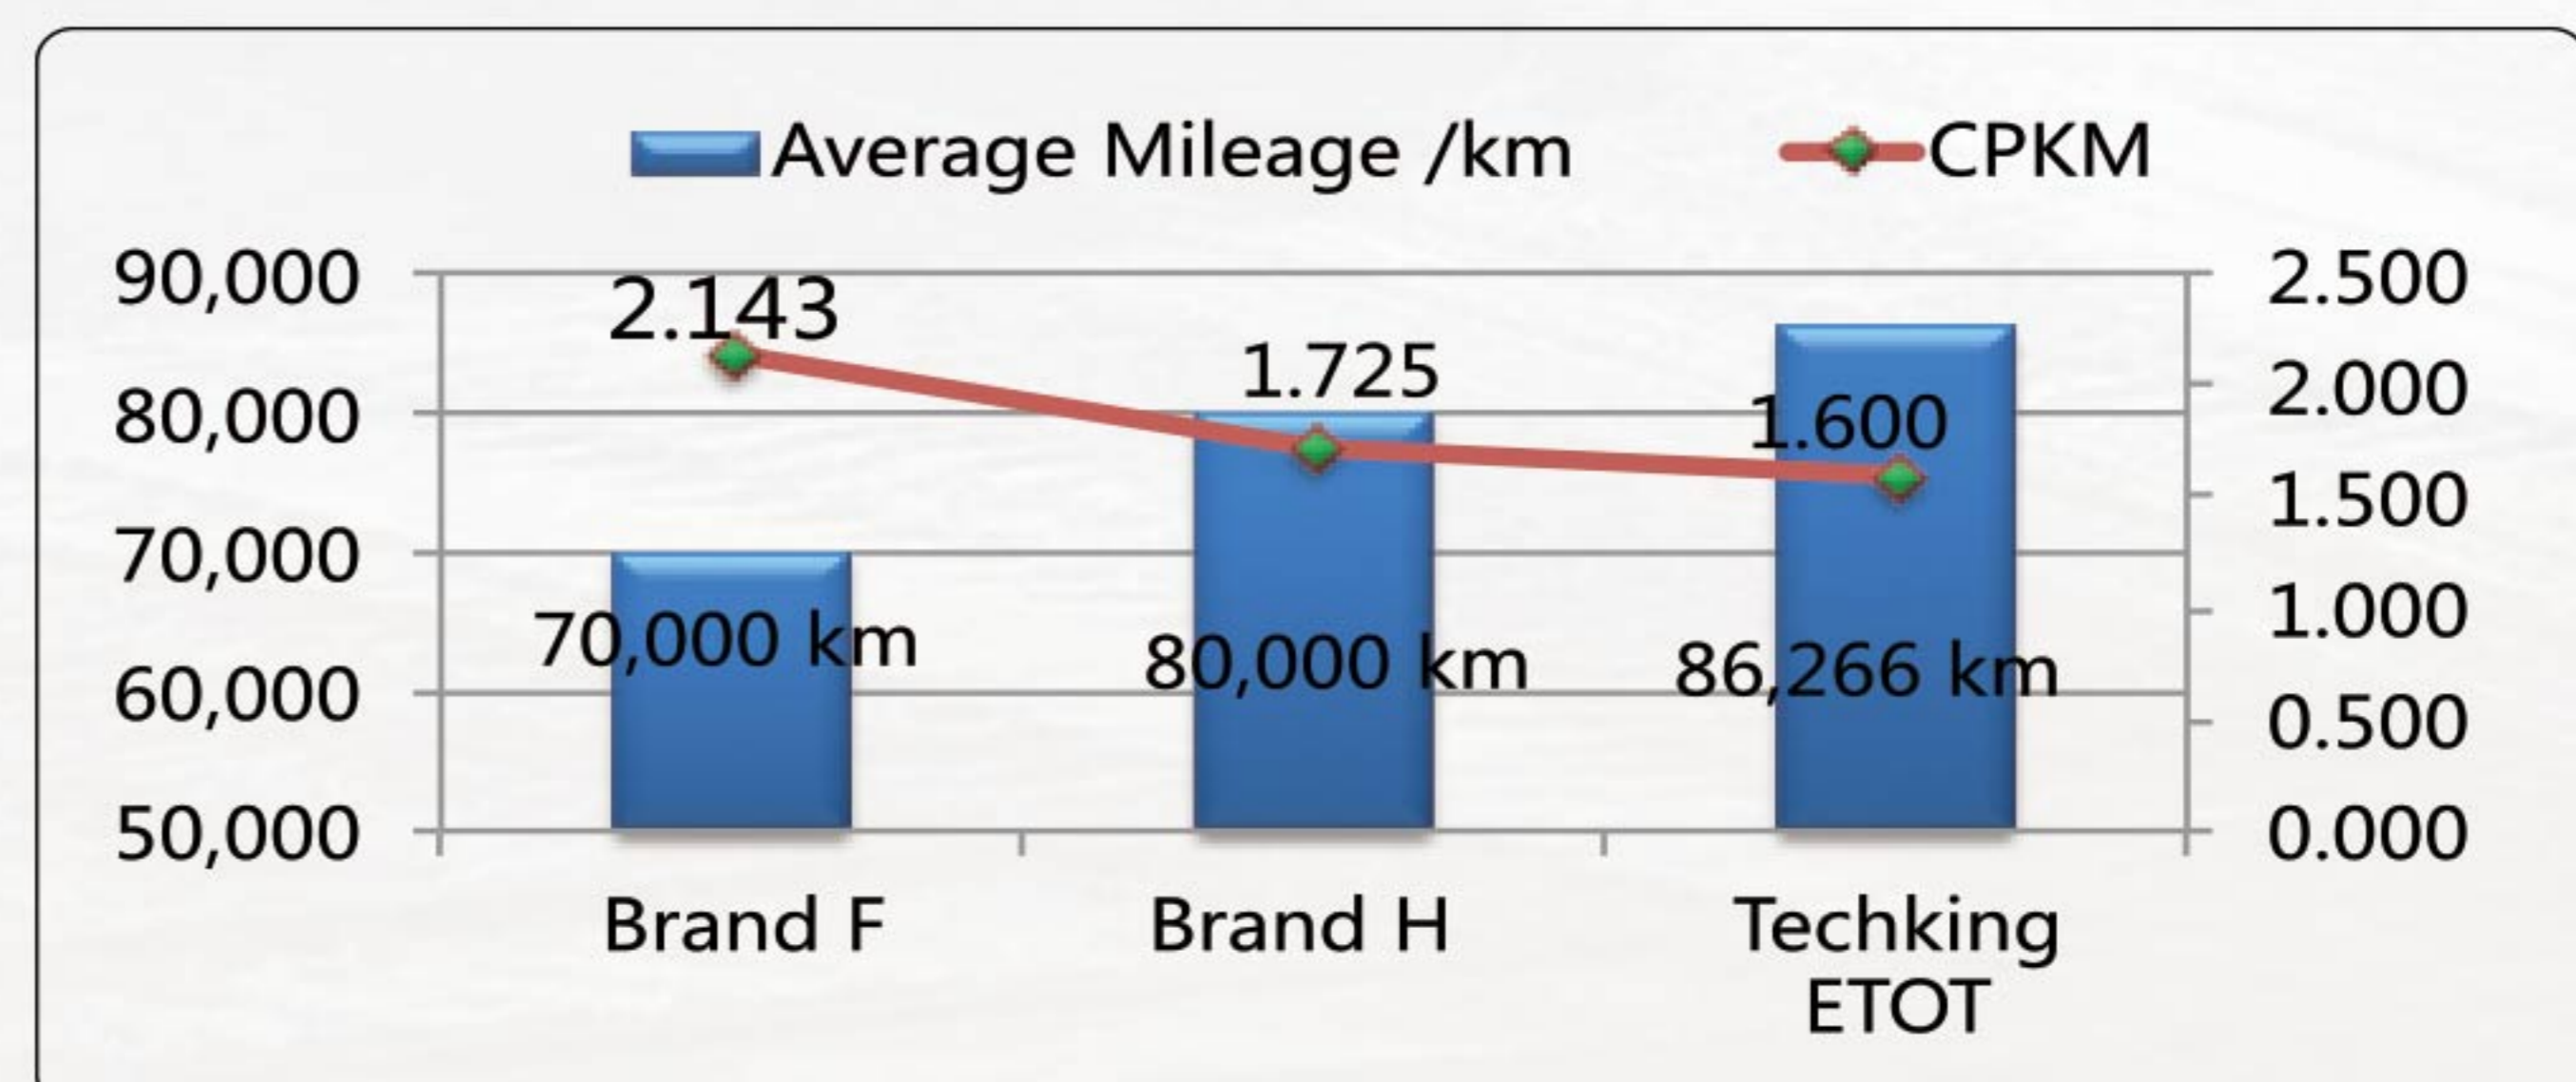

- Under the same working condition, the total mileage of Techking 12R22.5 ETOT is longer than Brand F and Brand H.
- The CPKM of Techking 12R22.5 ETOT is the lowest, and can provide another circle of lifetime.

Size	PR	Tread Depth (mm)	LI & SS	Load Capacity		Max. Load Capacity (kg)	Standard Pressure (kPa)	Type
				Single	Dual			
11R22.5	18	24	148/145K	3150	2900	2900	900	TL
12R22.5	18	24	152/149K	3550	3250	3250	930	TL
295/80R22.5	20	22	154/150K	3750	3350	5360	960	TL