

**ETSA**

# Special for Sand & Soft Ground Application



**100%  
Max. Load  
Capacity**



FOCUS ON MINING & CONSTRUCTION INDUSTRY


SOFT GROUND




**ETSA**



**Better heat releasing performance**  
Cooling-Max Compound

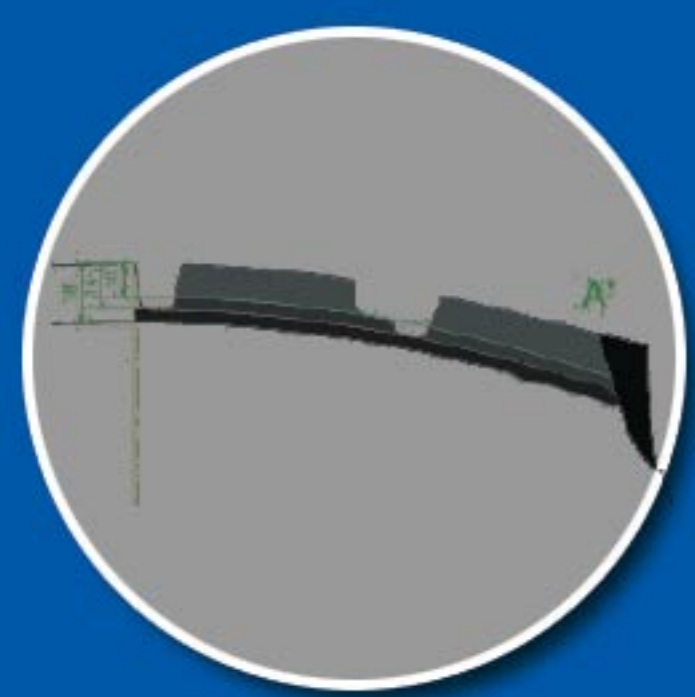

**Better floatability performance**  
Ladder-Block Design for bigger contact area

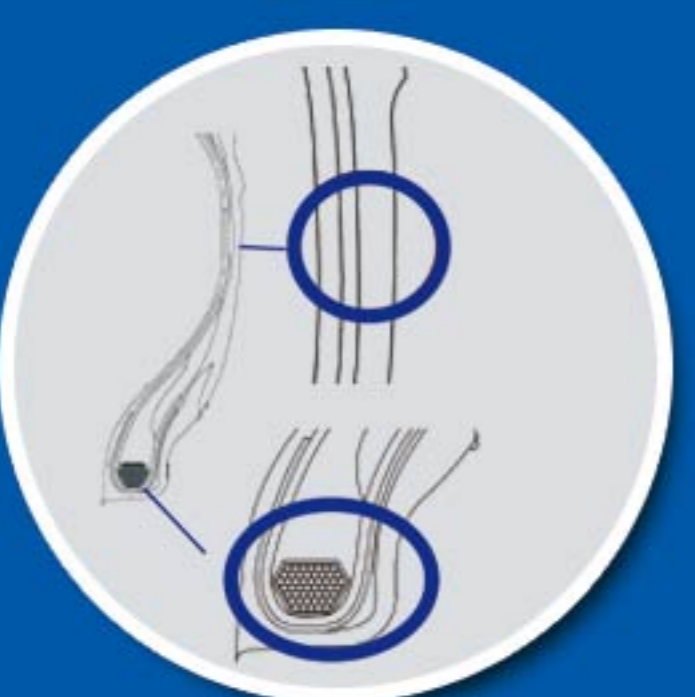

**Better puncture & cut resistance performance**  
+2mm Sidewall-Plus Design & Reinforced Bead Design

| Size     | PR | Tread Depth (mm) | LI & SS  | Load Capacity(kg) |      | Max. Load Capacity (kg) | Standard Pressure (kPa) | Type |
|----------|----|------------------|----------|-------------------|------|-------------------------|-------------------------|------|
|          |    |                  |          | Single            | Dual |                         |                         |      |
| 14.00R20 | 20 | 18               | 164/161J | 5000              | 4625 | 4625                    | 790                     | TT   |