



Max. 130% Load Capacity

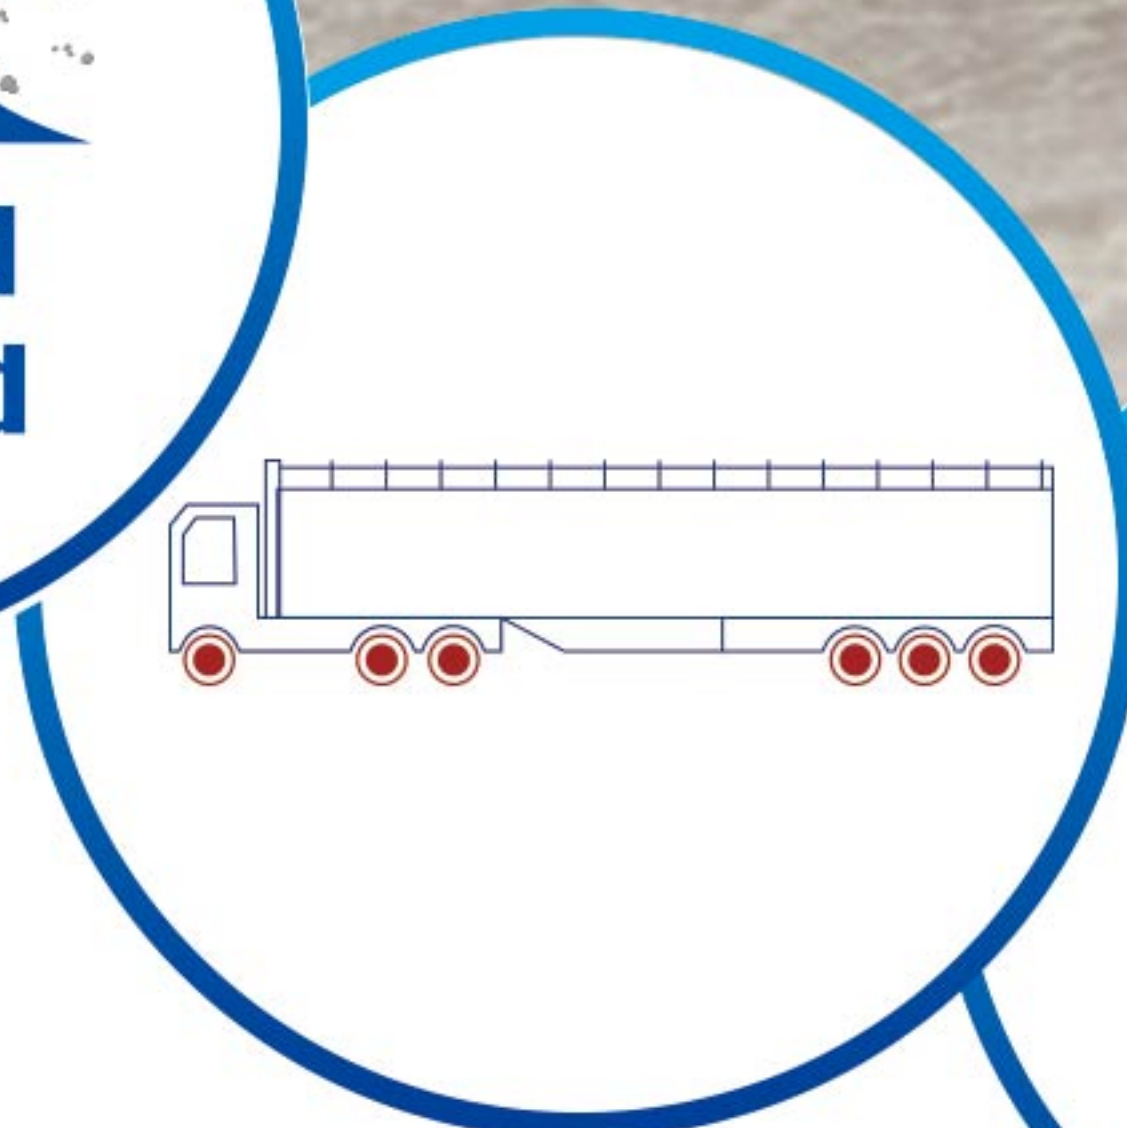

SUPER AM

- **130% load capacity**

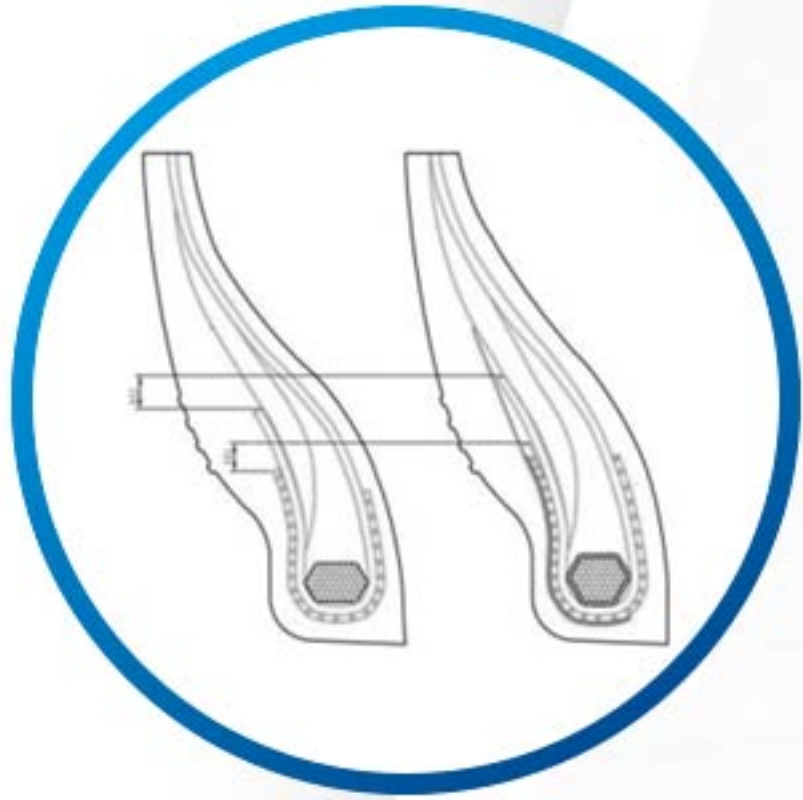

Super Stiff Design

- **Longer mileage**



Block Bridge Design on tire shoulder for reducing irregular wearing

- **Better wear resistance performance**



7% Wider Design than tier-one brand



Size	PR	Tread Depth (mm)	LI & SS	Load Capacity		Max. Load Capacity (kg)	Standard Pressure (kPa)	Type
				Single	Dual			
325/95R24	22	18.5	162/160K	4750	4500	5850	850	TT