


**TECHKING**  
TIRE SOLUTIONS

## BUILT STRONGER, LOAD MORE

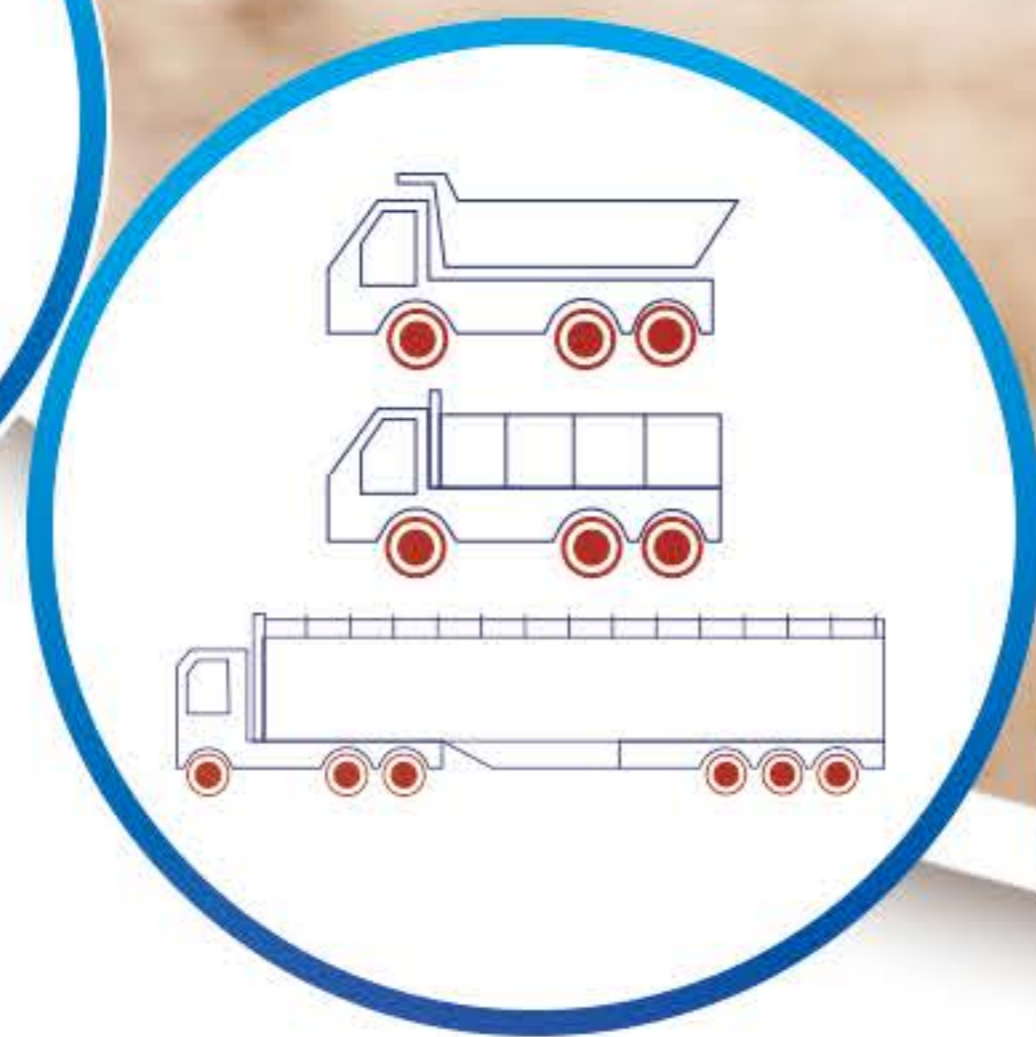

**TKAM II S**

- **Puncture Resistance Compound**
- **Reinforced Bead & Carcass Design**
- **High Saturation Pattern Design for better wear resistance performance**

Size	PR	Tread Depth (mm)	LI & SS	Load Capacity		Max. Load Capacity (kg)	Standard Pressure (kPa)	Type
				Single	Dual			
11.00R20	16	16	150/147L	3350	3075	6500	830	TT
11.00R20	18	16	152/149L	3550	3250	6500	930	TT
295/80R22.5	20	16	154/150K	3750	3350	5360	960	TL
315/80R22.5	22	17	170/167K	6000	5450	6500	970	TL