


# Longer service life Designed for complex road conditions




**70% on road  
30% off road**

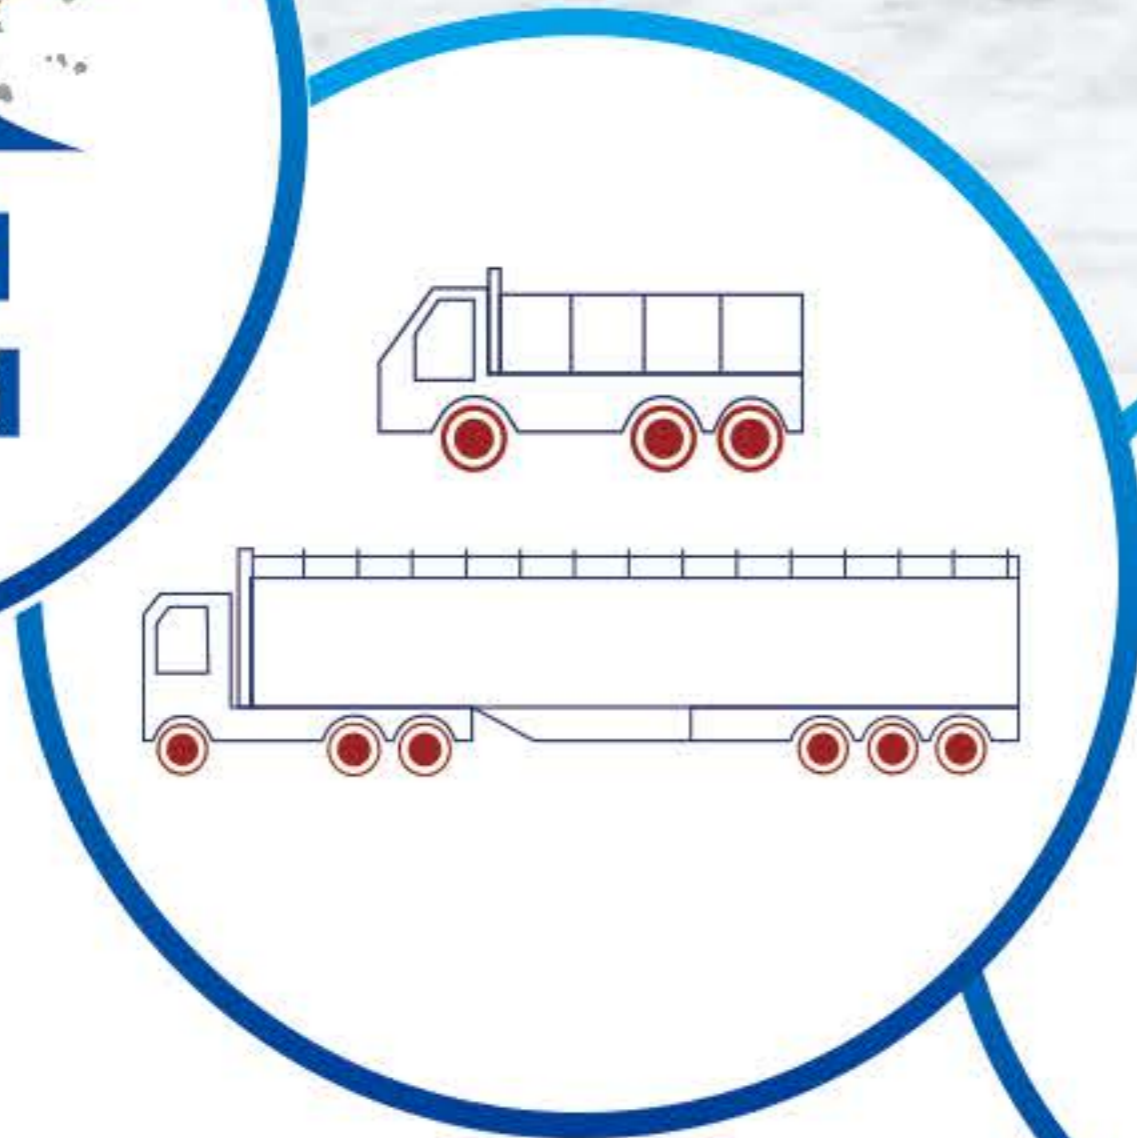

**100%**  
Max. Load  
Capacity



**TKAM III**

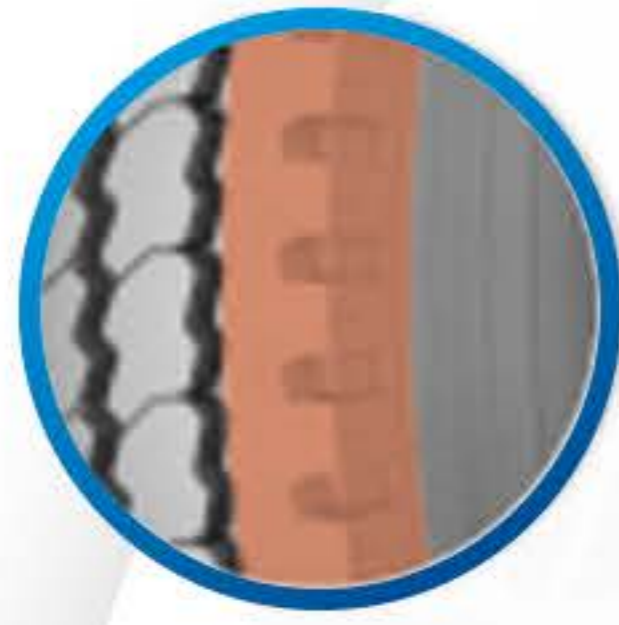

• **Semi-open Shoulder Design for better traction capacity**



• **Variable Pitch Sequence Design for noise reduction performance**



• **Arc Groove Design to prevent stones**



## 12.00R24 TKAM III Field Performance from Middle East



Tire Size & Pattern	Vehicle Model	Speed	One-way Distance	Original Tread Depth	Remaining Tread Depth	Current Working Time	Projected Tire Life
12.00R24 TKAM III	2DDTT	on road: 70km/h off road: 30~40km/h	300 km	17mm	10mm	7 months	<b>14 months</b>

Size	PR	Tread Depth (mm)	LI & SS	Load Capacity		Max. Load Capacity (kg)	Standard Pressure (kPa)	Type
				Single	Dual			
12.00R24	20	17.5	160/157K	4500	4125	4125	900	TT
13R22.5	18	17.5	154/151L	3750	3450	3450	830	TL