


# Longer service life Designed for complex road conditions



**TKSW II**

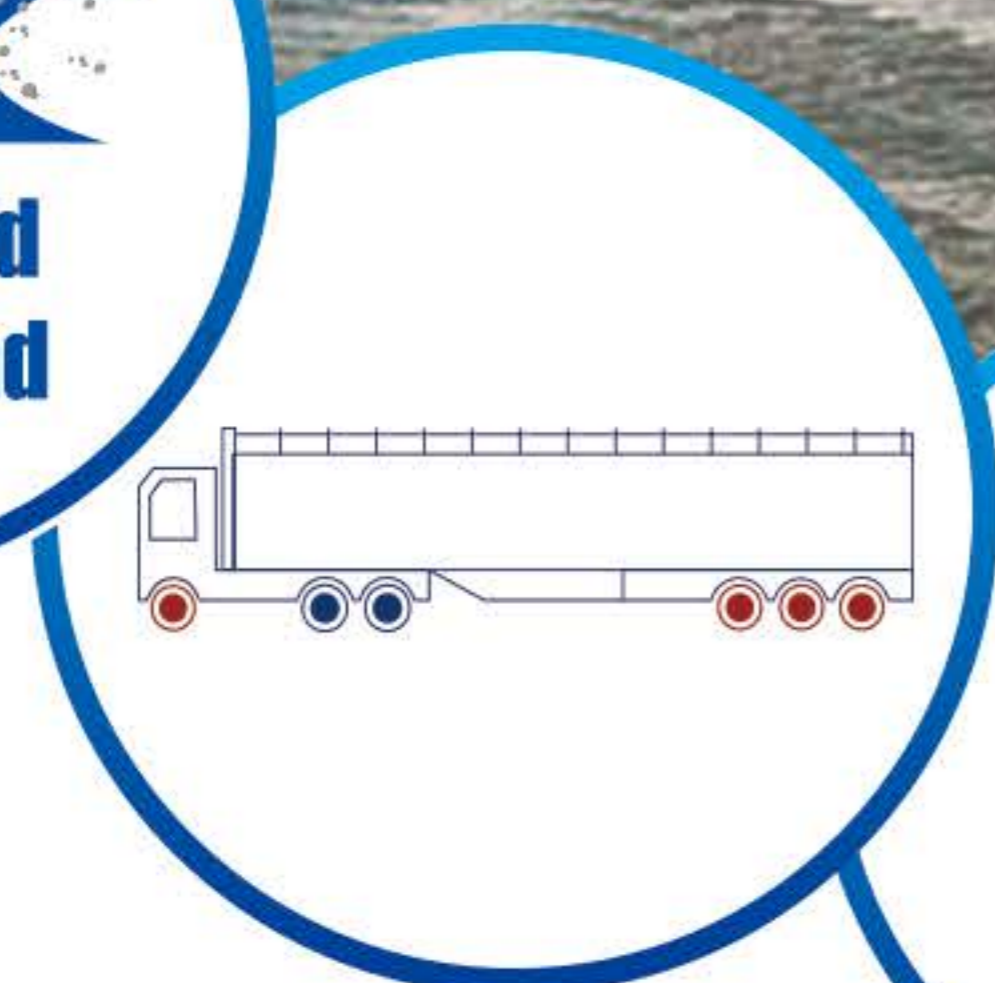

**Speical Compound Design for Complex road conditions**



**Close-shoulder Design**



**Cooling System Design for better heat releasing performance**

Size	PR	Tread Depth (mm)	LI & SS	Load Capacity (kg)		Standard Pressure (kPa)	Type
				Single	Dual		
385/65R22.5	20	15	160K	4500	—	900	TL